



A SLICE OF SUCCESS

ALL-IN-ONE SOLUTIONS!
MACHINERY AND EQUIPMENT
FOR THE

**SAWN
WOOD**
PROCESSING



KALLFASS
*maschinen plus
automation*

FROM THE BLACK FOREST TO THE ENTIRE WORLD

We have a passion for machinery and plant engineering that is now in its third generation. Since 1949, we have focused intently on production requirements in timber processing. Our market and process know-how is characterised by comprehensive and profound experience. We do not provide any off-the-shelf solutions, but rather tailored, automated system technology of the highest quality.



SYSTEM PARTNERSHIPS ON AN EQUAL FOOTING

Together with our customers, we plan, develop, and implement customised, interlinked production lines. Our product range includes **SYSTEMS AND COMPLETE MECHANISATIONS** with integrated safety and control concepts for the production of:



Construction timber

boards
squared timber
sticks
beams



Wooden packaging

pallets
boxes



Construction and garden timber

decking
fencing



Structural engineered wood products

cross-laminated timber
glued laminated timber
single/multi-layer boards

KALLFASS WORLDWIDE PROJECTS

As a family-run company with production sites in the northern Black Forest and in Saxony-Anhalt, Germany, we deliver our plant technology all over the world. We have completed in excess of 1,000 complex projects together with renowned companies in the sawmill and sawn timber industry worldwide.



PLANER MECHANISATION

FULLY AUTOMATED SAWN TIMBER PROCESSING

KALLFASS designs a high-performance, fully automated planing mill based on innovative plant technology with process solutions that are optimised for all interfaces. The integrated control and safety concept ensures a perfect production process with a high degree of automation and maximum safety for the operating personnel.

COST-EFFECTIVE SOLUTIONS FOR A **CONSISTENTLY HIGH** PLANT PERFORMANCE

When using vacuum lifters or tilting platforms whilst destacking drying packages, a **STICK SCANNER**, detects whether sticks are on a layer. If this is the case, the scanner passes this information to a **STICK STRIPPER**, which subsequently drives across the layer. Before planing, an integrated **MOISTURE, STRENGTH** and **WARP MEASUREMENT** with a **TURNING DEVICE** ensure perfect planing results. The sawn timber's quality can be evaluated automatically using a **QUALITY SCANNER** and/or manually using an **ASSESSMENT CHAIN CONVEYOR**. These are all mechanisation solutions that enable consistent plant performance at the highest level.

FOR SMALL AND LARGE PACKAGES VARIABLE TIMBER BUNDLES

THE KALLFASS BUNDLING SYSTEM

This system combines individual timber pieces of the same dimension into compact and stable timber bundles before stacking or transport. Depending on the product requirements and dimensions, either several small parts positioned next to each other or individual large parts can be bundled and stacked into wood packages on the same system.

SECURING TRANSPORT PACKAGES USING **FOILING AND STRAPPING**

When foiling large, small or quart sawn timber packages after stacking protects the sawn timber from damage during transport and later storage. If requested, 2 - 3 small packs (possibly already individually wrapped and strapped) can be brought together as narrow quart packs on a loading width of 1,200 mm and subsequently wrapped and/or strapped.

When subsequently stacking large packages in multiple layers, **squared timber** placed between the individual wrapped/strapped packages as well as under the lowest package ensure the safe removal later using the forklift truck. Finally, the large package can be strapped again to ensure greater stability during transport. In this example, several foil wrapping and strapping stations would be integrated into the system. Depending on the requirements, the package strapping system is offered with or without hydraulic press, squared timber magazine, and squared timber milling machine.


MARKING PRODUCTS WHILST MOVING – **INTEGRATED LABELLERS** WITH INKJET PRINTER

To increase the automation, commercially available labelling systems are integrated directly into the production line. Labelling of the wooden strips or wooden bundles takes place at the appropriate location during the production process. Data from higher-level ERP systems can be incorporated with great flexibility via interface software.

SORTING THE SAWN TIMBER

ENHANCING TRANSPARENCY, QUALITY AND UTILISATION

We have the solution for a fully automated sorting system that allows to be flexible and switch between different product orders, with little personnel effort and low retooling times. Moreover, this system offers the additional option of integrating sawn timber bundles from external infeeds.

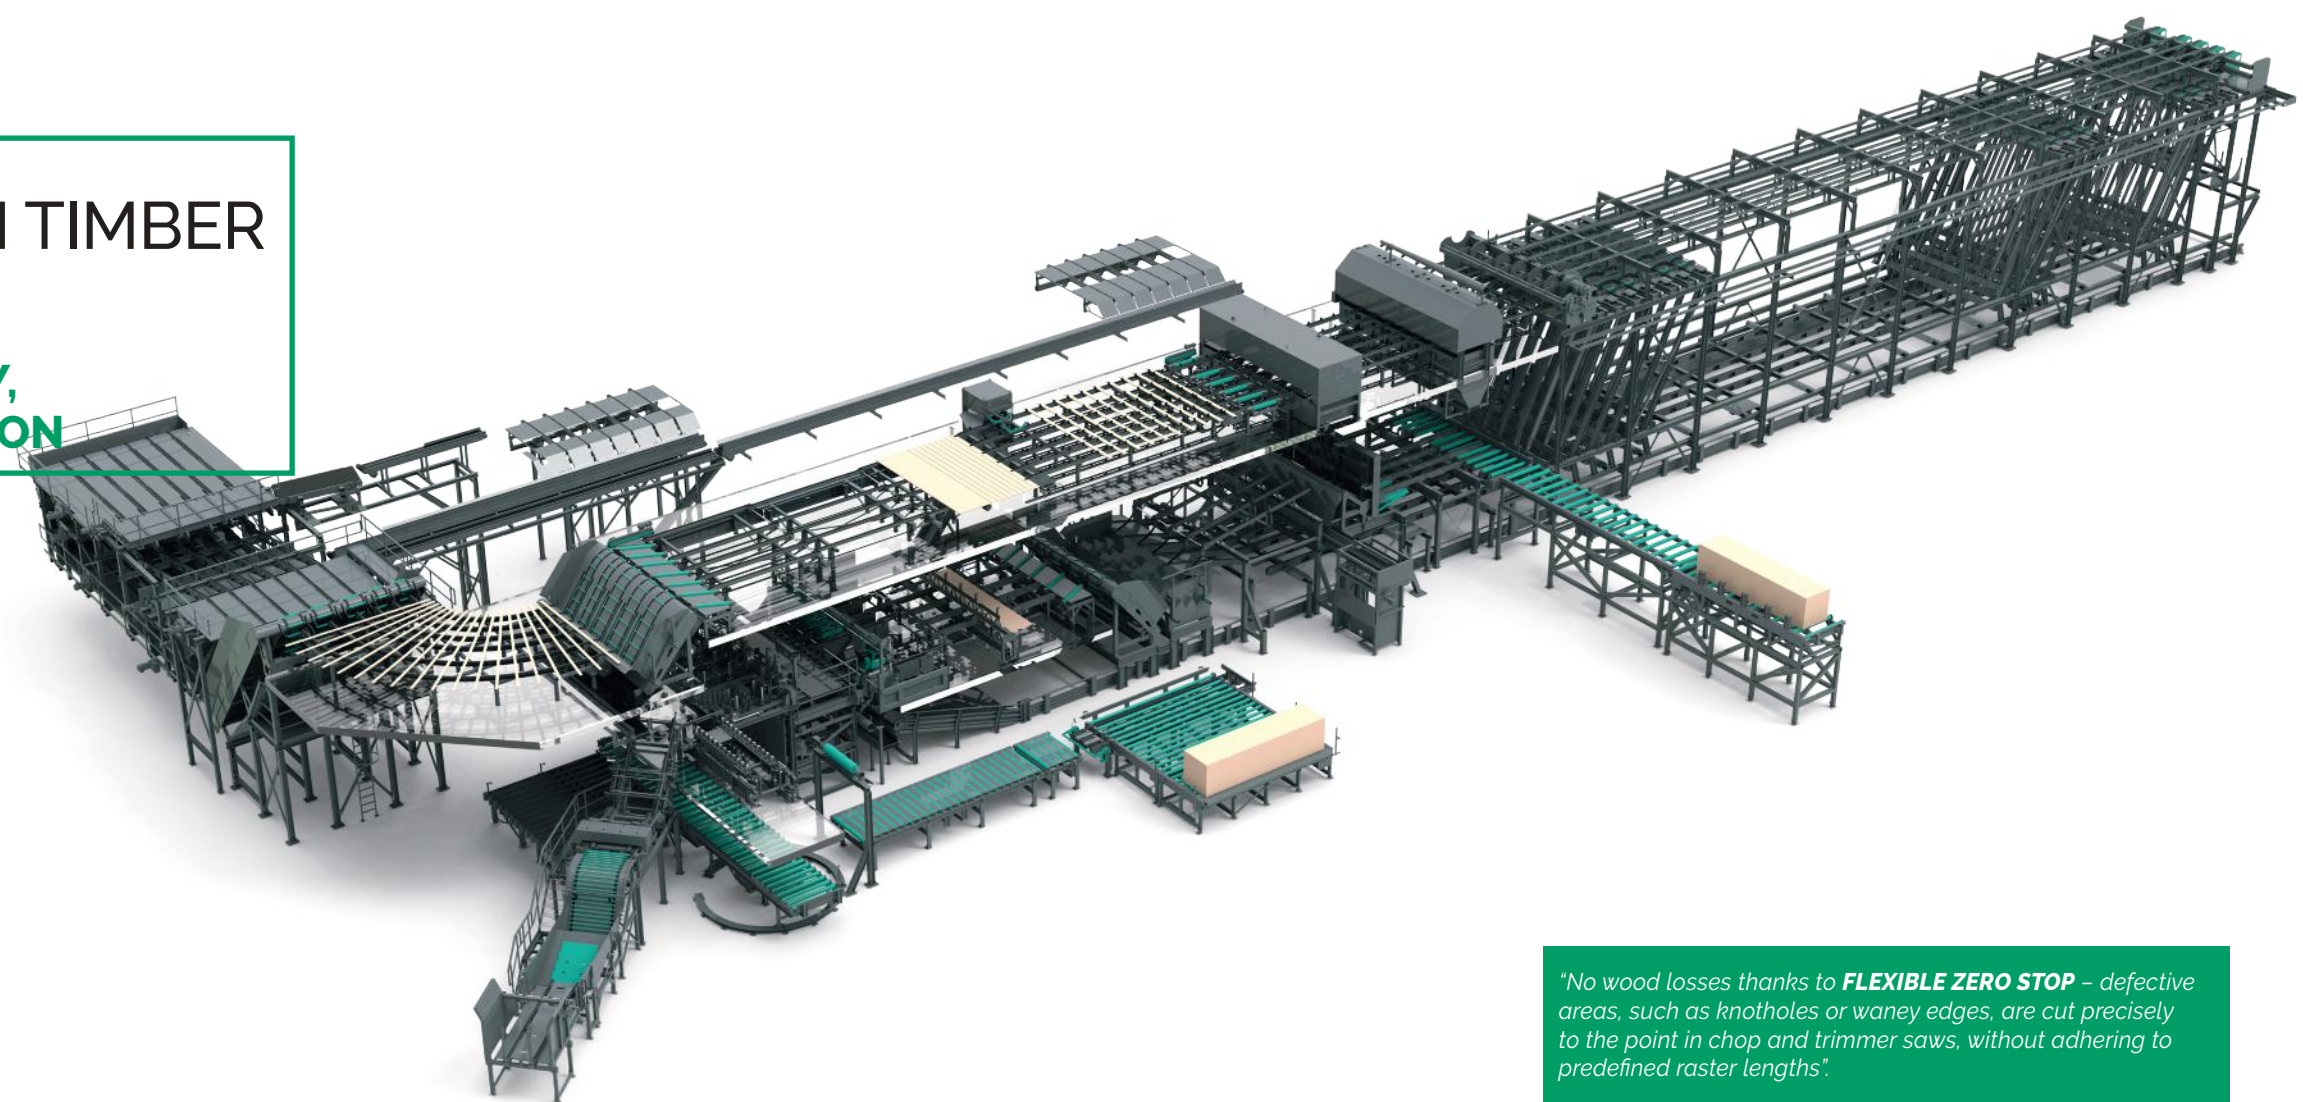


*"No wood losses thanks to **FLEXIBLE ZERO STOP** – defective areas, such as knotholes or waney edges, are cut precisely to the point in chop and trimmer saws, without adhering to predefined raster lengths".*

EVERYTHING UNDER CONTROL


The sorting process is based on defined quality parameters that have previously been stored as grades in a database. An upstream scanner detects existing waney edges and passes the appropriate trimming information directly to the trimmer saw. As an option, the scanner can also be used to measure the length, width, thickness, and quality of the sawn timber. A visualisation interface clearly displays all processes in the sorting system. It not only provides information on filling levels and occupancy status of the individual areas at a glance but also simplifies the management of system parameters.

PRODUCT CHANGE WHILST THE PRODUCTION IS IN PROGRESS

Each sawn timber dimension and type receives a product name (an article number upon request). This information is stored in the sorting programme, which transfers all necessary setting parameters to the next process. **EXAMPLE:** The multiple cross-cut saw recognises by the product name which material is to be fed in next. Subsequently, the system adjusts its saw aggregates automatically according to the cutting pattern.

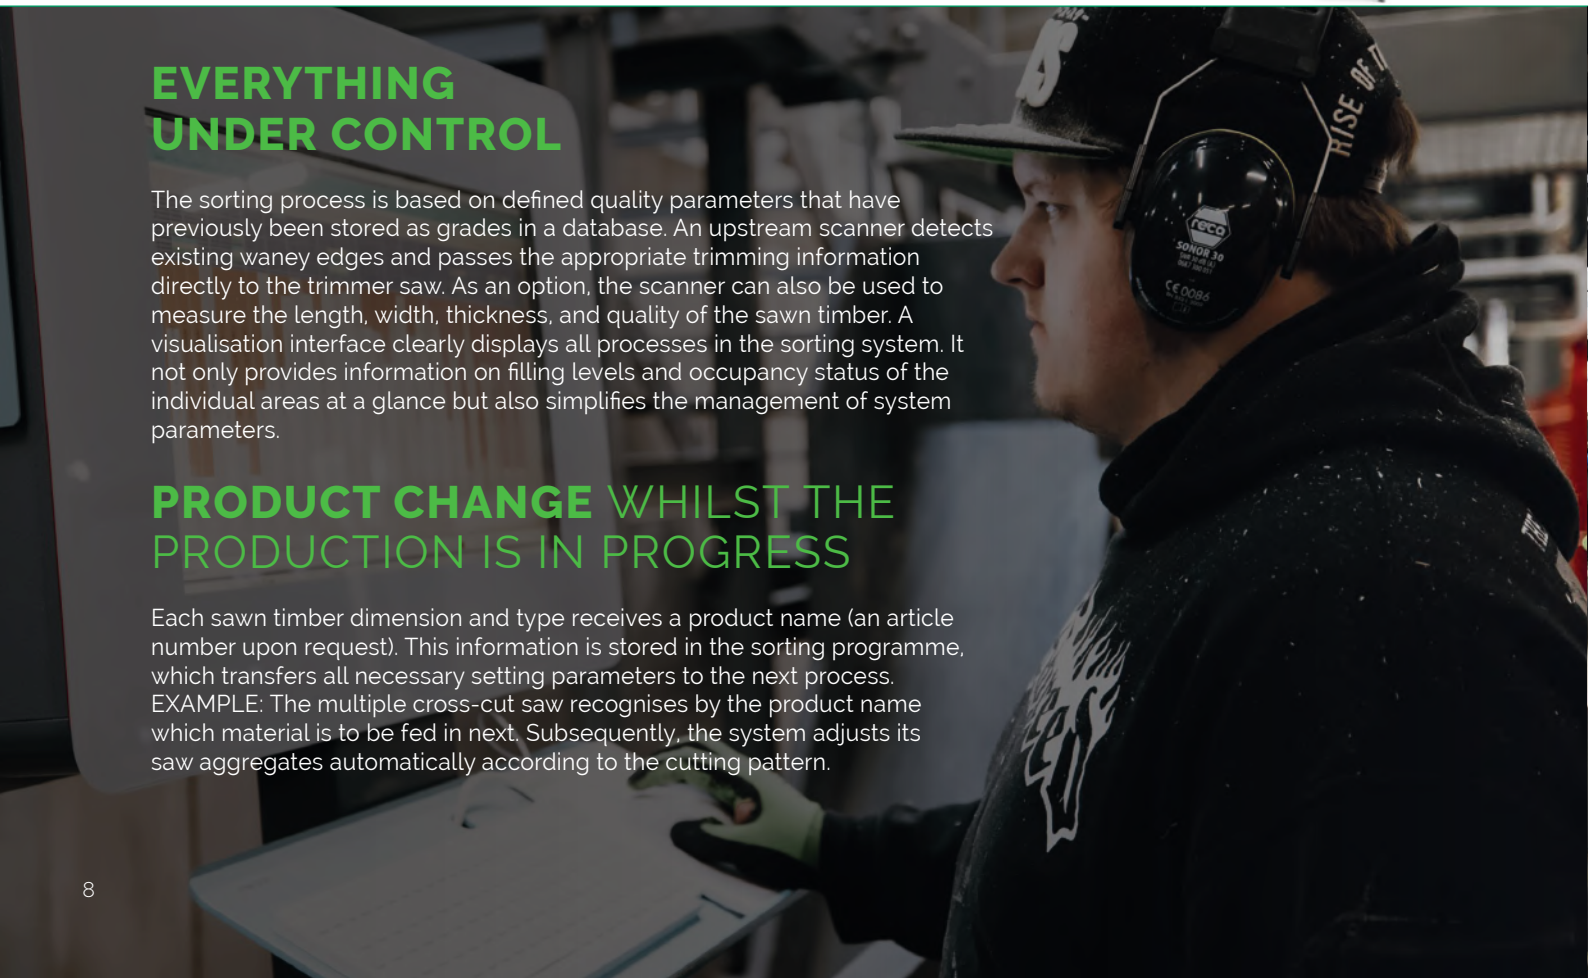

PATENTED PROCEDURE! Robots take over the continuous and time-consuming task of loading stacking sticks into stick magazines. In combination with stick scanners, only wood sticks in suitable quality are made available for robot handling. A high-performance solution for state-of-the-art, fully automated production of sawn timber.

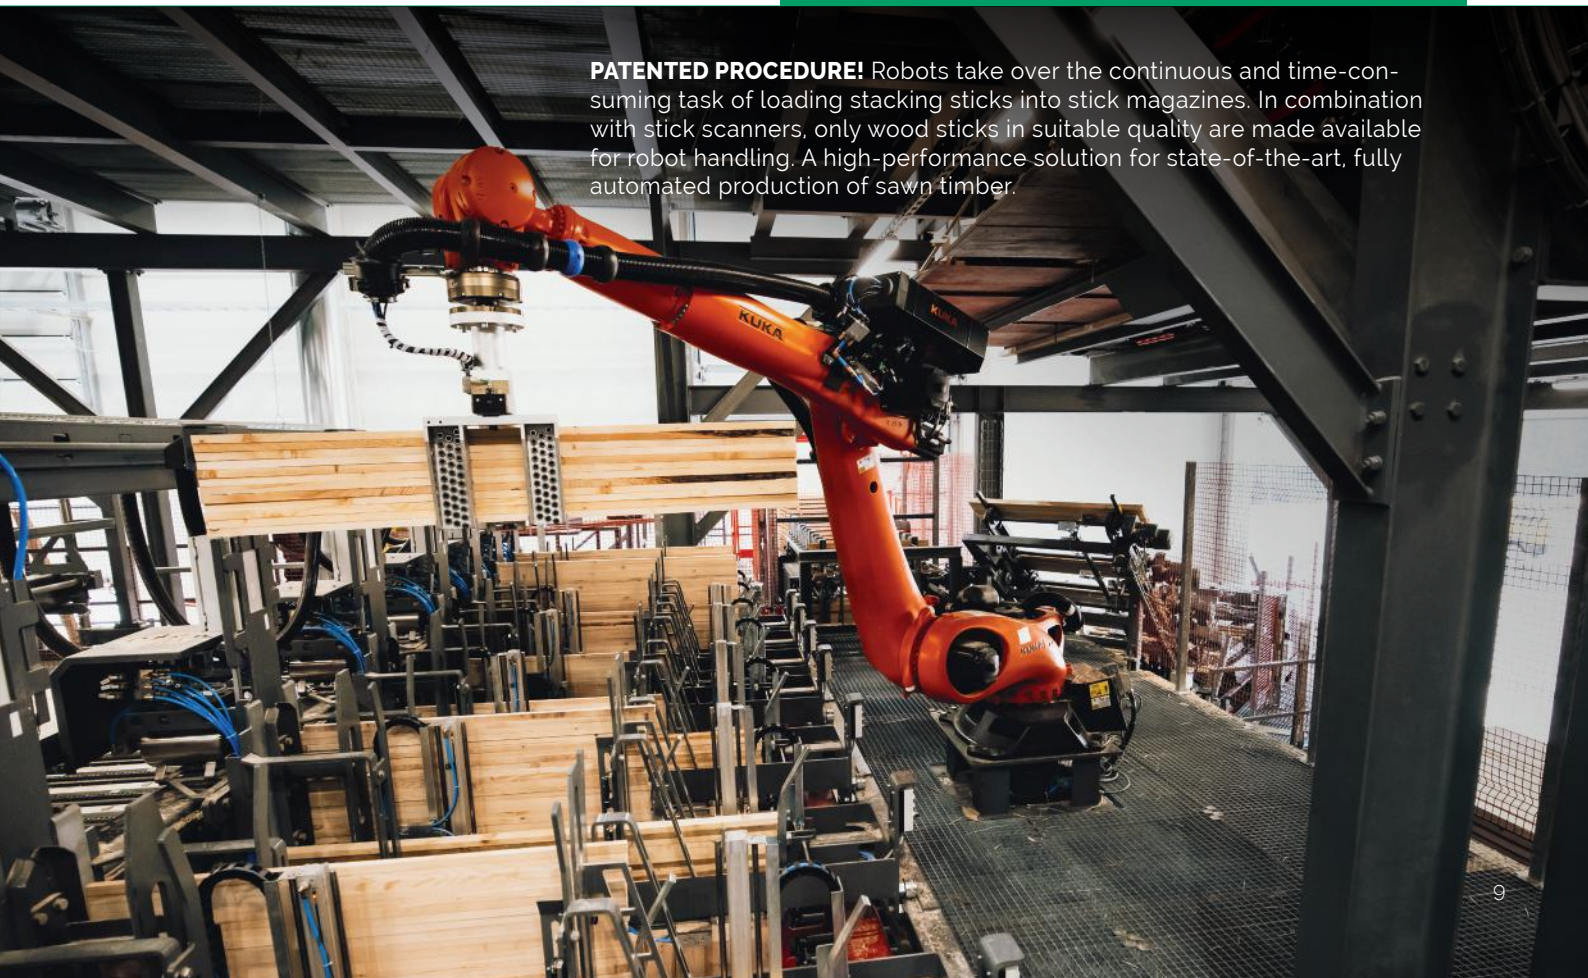

HORIZONTAL AND GENTLE TO THE MATERIAL LEVEL SORTING




Buffer layer sorters loosely sort batch material on top of each other into layers. The material must be separated before filling and after emptying the system.

Film layer sorters are ideal for graded planed products, as each board film is gently and individually sorted into stacked layers. This type of sorting is very space-consuming; however, it makes subsequent separation unnecessary and the layers can be stacked at maximum capacity.

VERTICAL AND SPACE SAVING BOX SORTING


Vertical box sorters need less space and can accommodate more product boxes in the same area. These systems are most often used for side products with smaller dimensions that do not tilt during emptying.


Inclined box sorting is recommended for products with small and medium-sized material dimensions. These systems can be filled at high cycle rates and ensure reliable emptying.

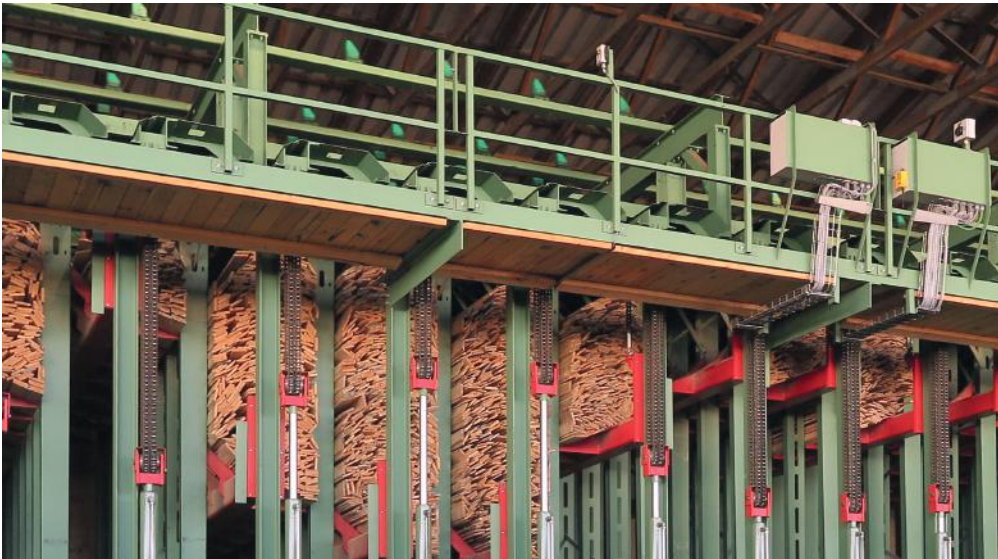

MACHINE DATA BOXES AND LAYER SORTING

Part lengths:	1,800 mm – 6,300 mm
Part width:	70 mm – 252 mm
Part thickness:	15 mm – 100 mm
Filling cycle time:	120 pieces/min. (inclined boxes: 160 pieces/min.)

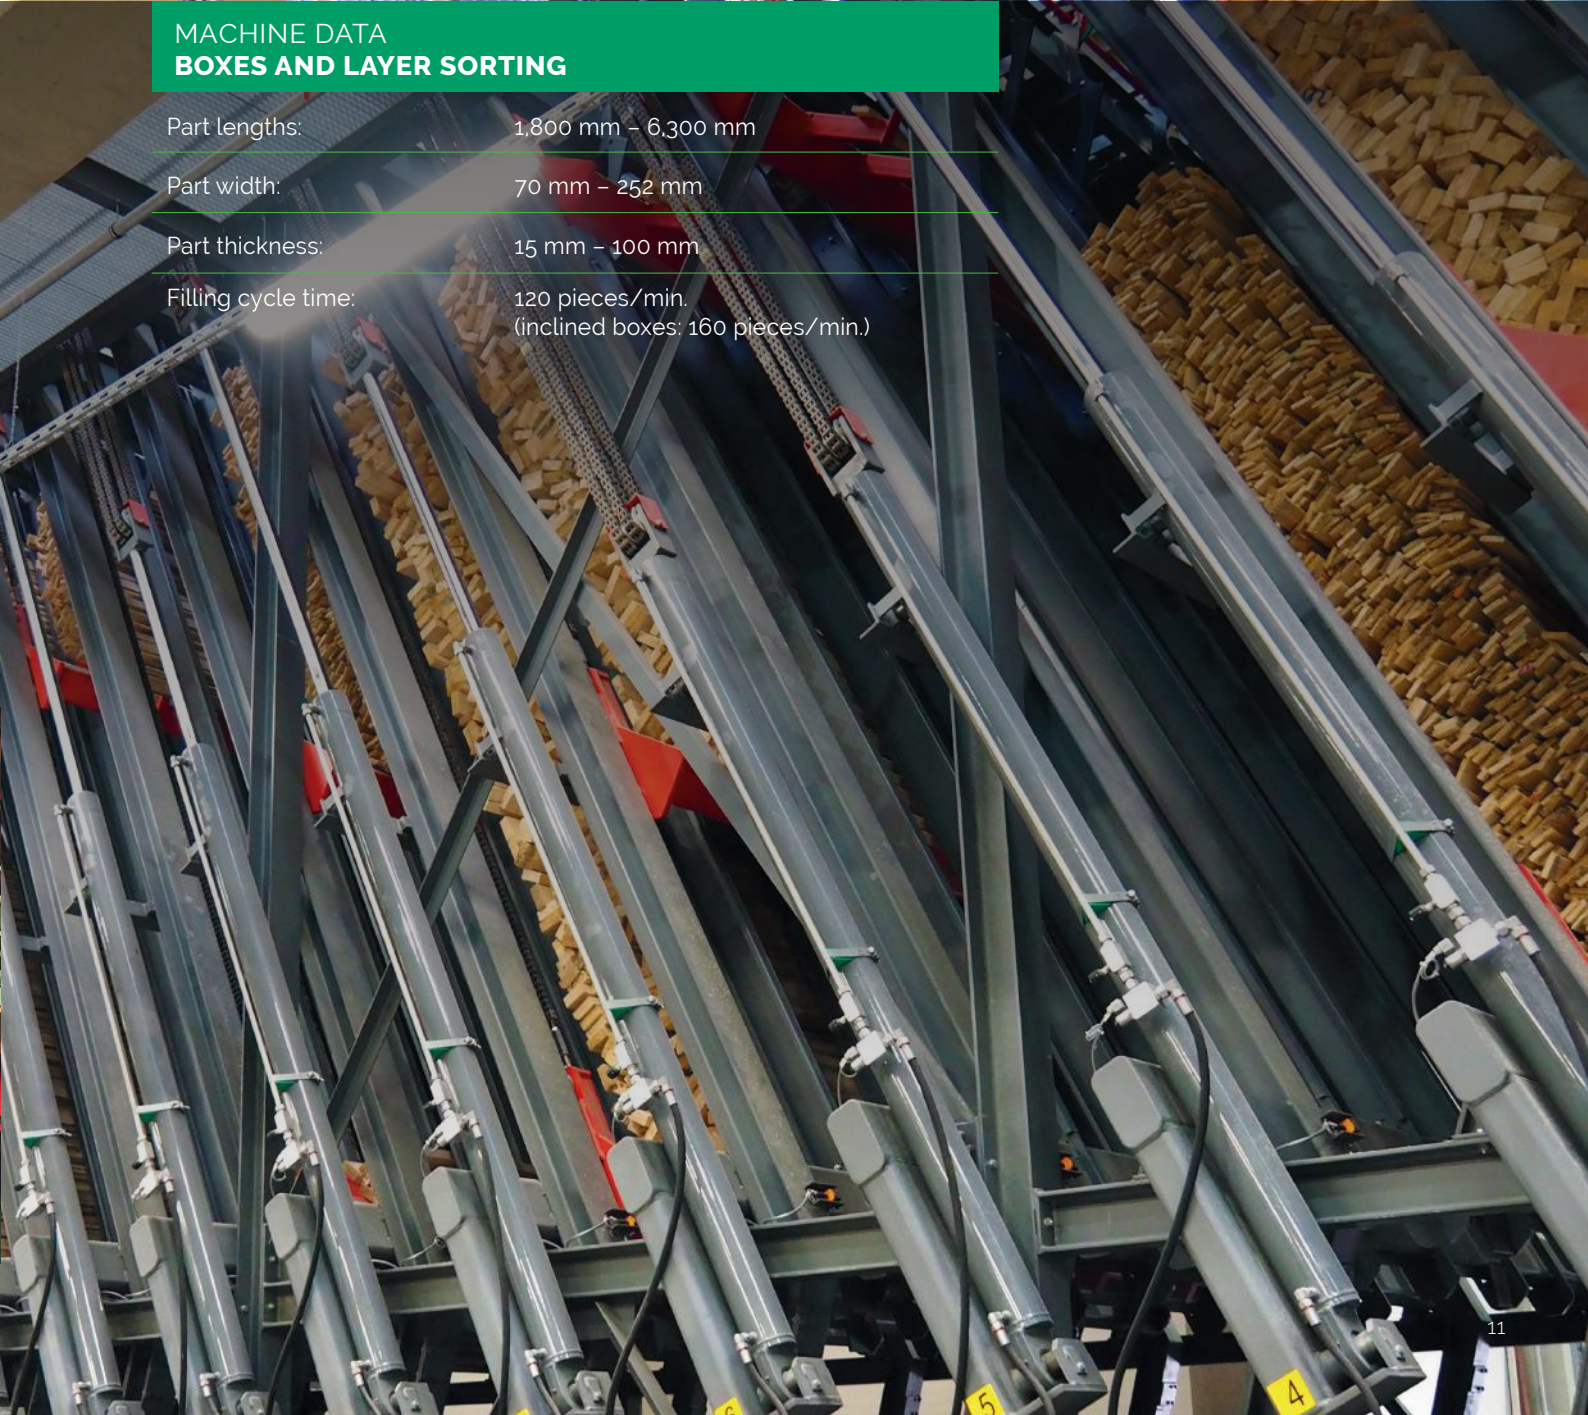

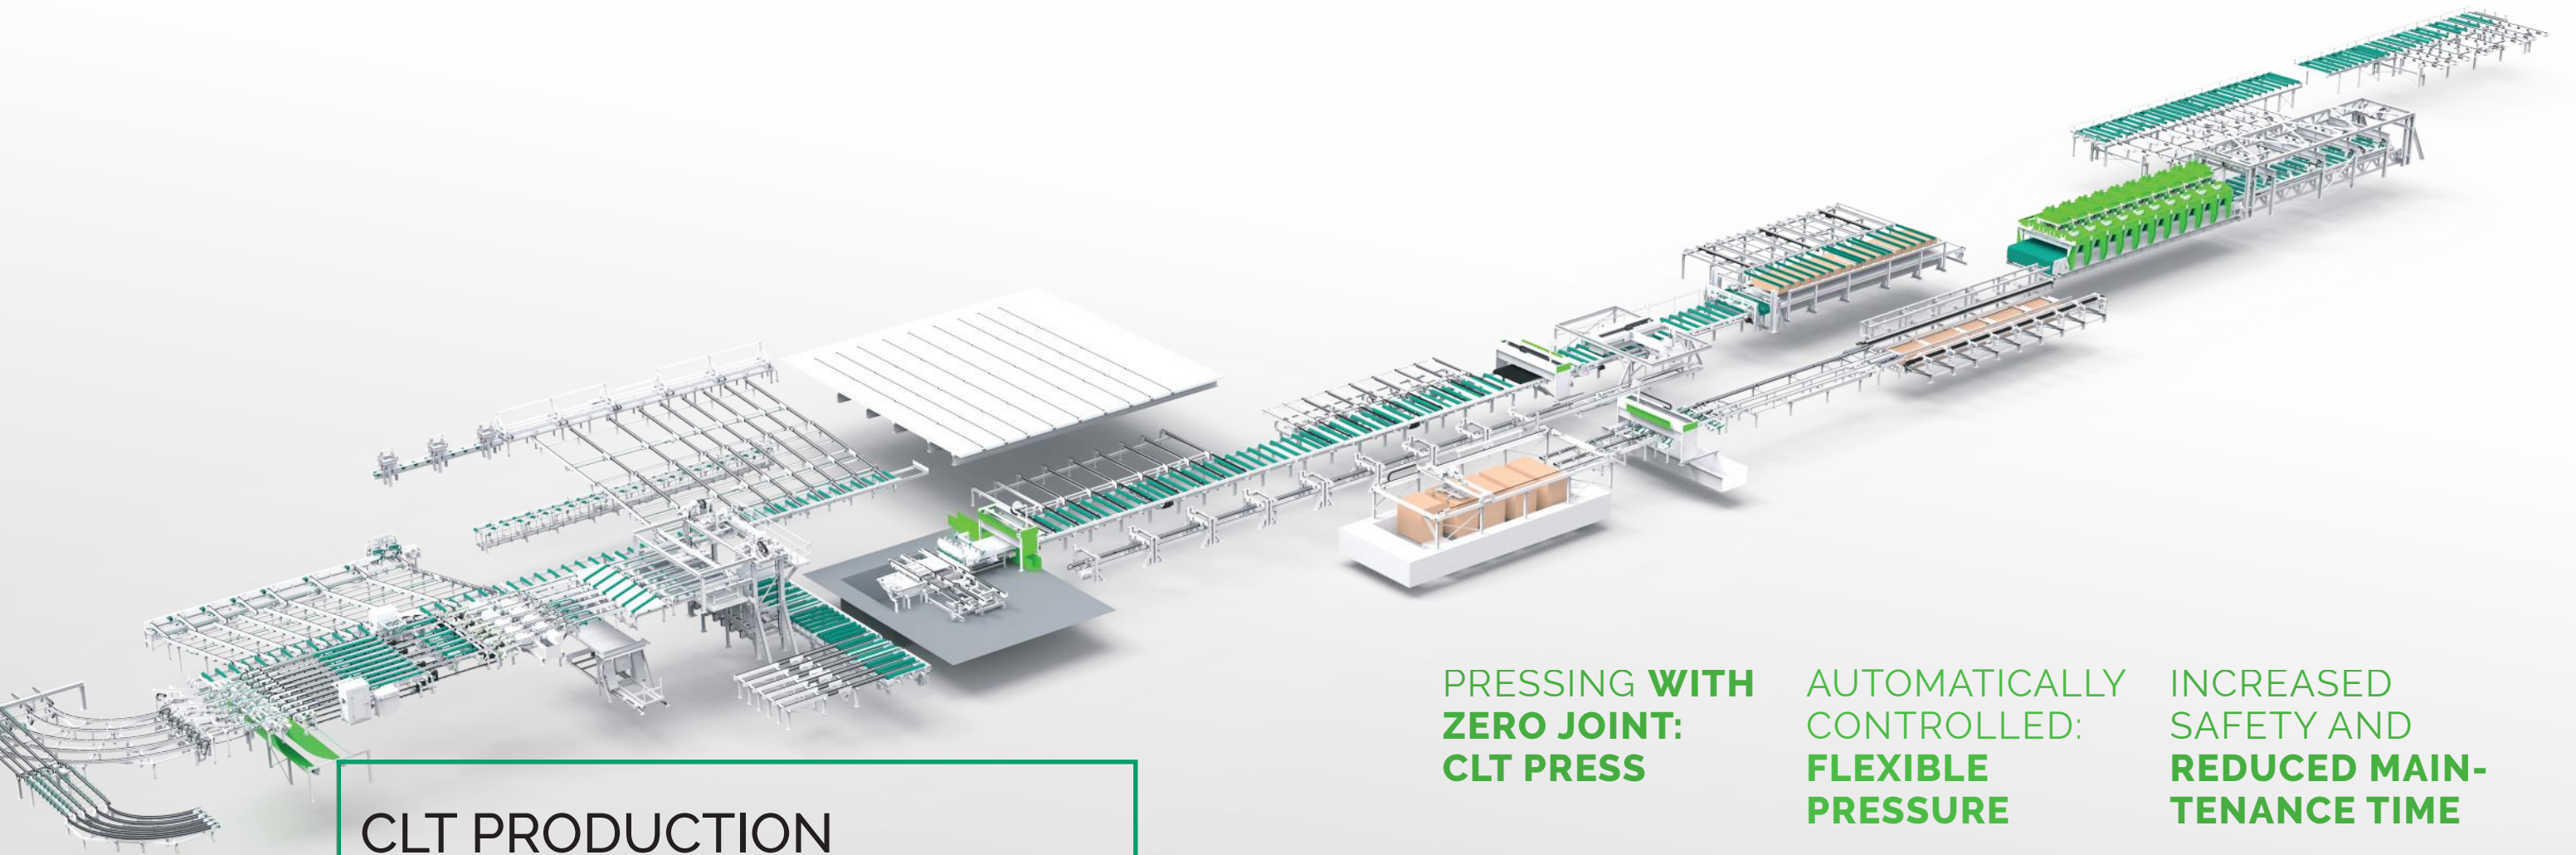

CLT PRODUCTION


ONE-STOP SHOP

As an automation specialist, we offer solutions for gluelam production that provides a solution with the least possible number of interfaces.

Our product range: The mechanisation of the entire production line, from the package pickup (also for large packages) to the acceptance of the finished pressed elements, including our board press and turning device.

Always focused: A steady flow of material with maximum process reliability through separate safety areas and perfect production utilisation.

The cross-laminated timber press comprises several torsion-resistant press segments arranged one behind the other. The elastic behaviour of the wood is taken into account when determining the required pressing pressure. A pressing pressure of 1 N/mm² can be built up even with a maximum panel width of 3.6 m.

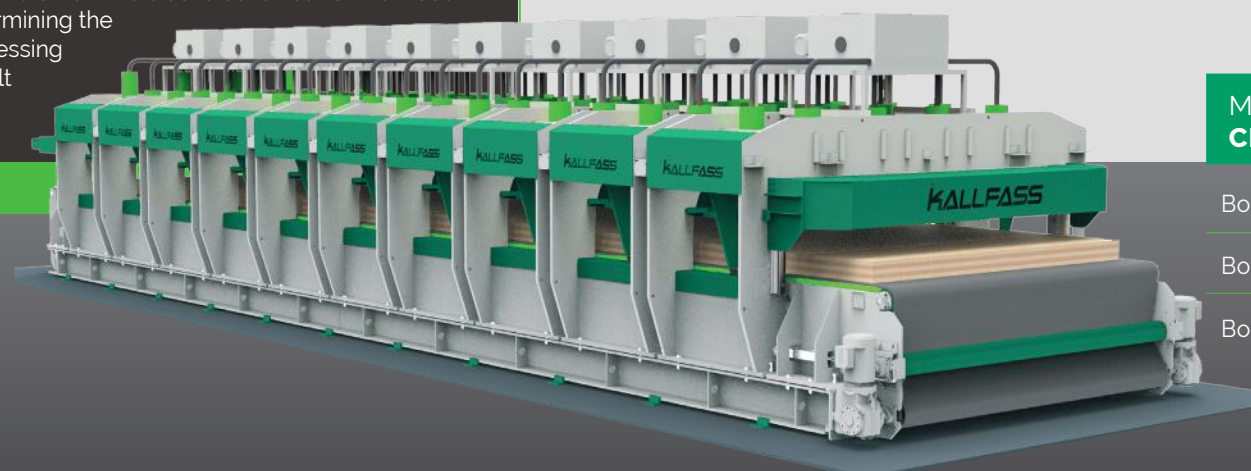

PRESSING WITH ZERO JOINT: CLT PRESS

The Kallfass cross-laminated timber press joins single-layer panels into multi-layer panels with tolerance values of maximum 0.1 mm. Achieving this zero joint is guaranteed through a very high vertical pressing force in combination with a uniform pressure distribution across the entire panel surface. As an option, the press can be offered with additional transverse pressure when pressing wooden lamellas. A virtually isobaric hydraulic concept that works independently of the different plate dimensions. The result is a perfect bonding finish and a homogeneous end product with reduced curing times.

AUTOMATICALLY CONTROLLED: FLEXIBLE PRESSURE

The integrated system control automatically sets the pressure and adjusts it to the relevant panel size. Only those chain conveyor units and press stamps are controlled that are required for the board size, and this is what makes the Kallfass press so efficient.

To speed up the pressure build-up, the press stamps can be pre-positioned. If necessary, return runs of the board press packs are possible as the conveyor can be moved back and forth. The process data and parameters can be recorded and archived on the master computer.

INCREASED SAFETY AND REDUCED MAINTENANCE TIME

To protect the operating personnel, the press stamps can be mechanically locked in the upper end position before proceeding with cleaning and maintenance work. Plastic conveyor belts, which can be cleaned quickly and easily, serve as press pads. A full-length platform above the press assures access to all essential components such as hydraulic and electric system.

MACHINE DATA CLT PRESS

Board length:	8,000 mm – 16,000+ mm
Board width:	2,000 mm – 3,600 mm
Board thickness:	60 mm – 600 mm

MULTIPLE CROSS-CUT SAW

THE ALL-ROUNDER

Whether boards, panels, squared timber or round bars, the KALLFASS multiple cross-cut saw cuts workpieces to the desired lengths using millimetre precision. Upon request mitre cuts are available as well.

Typically, MULTIPLE CROSS-CUT SAWS are integrated into fixed-length cutting systems, sorting systems or planing mechanisations. These multiple cross-cut saws can cut both unfinished and planed sawn timber to fixed lengths, with a high cutting accuracy and tolerance of only ± 1 mm at the ends. The workpieces are cut individually or in layers (max. 16 layers/min) and up to a cutting thickness of 200 mm (thicker cutting heights upon request). As an option, the board dimension data sets can also be obtained directly from the ERP system or the customer's master computer.

MACHINE DATA MULTIPLE CROSS-CUT SAW

Fixed saw	right/left
Min. cutting length	500 mm
Max. cutting length	16,000 mm
Max. cutting thickness	200 mm
Cutting accuracy	1 mm
Saw motor output	5.5 - 18 kW
Feed capacity	3 kW
Max. feed rate	50 m/min

„PRODUCT SAFETY AT THE HIGHEST LEVEL FOR MANY YEARS - KALLFASS was the first German company to receive the German GS certification mark (Safety Tested) for these systems after type examination.“

FLEXIBLE CUTTING – QUICK RETOOLING

On the one hand, a fast batch change during production is achieved by using stored cutting programmes that allow flexible board cutting. On the other hand, saw aggregates that can be adjusted to any height and arrangement ensure quick changeover times, because a CNC control automatically aligns the aggregates synchronously with the cutting pattern during ongoing production. Assuming six saw aggregates are used, the time needed for changeover is only approx. 30 seconds. Even a mitre cut can be achieved in combination with a saw blade adjustment.

STABLE PROCESSES – SIMPLE OPERATION

If the sawn timber is warped, this can adversely affect the sawing process. Therefore, KALLFASS offers saw aggregates with chain top pressure as well as different transport chains as equipment variants. These aggregates also process warped goods safely. An extraction system integrated into the aggregate ensures a clean production environment. The wood dust is discharged downwards immediately during sawing. Upon request, a discharge through the top is also available.

All system-specific processes are operated in a controlled manner using a PLC control system. As an option, a visualisation feature makes system operation even more user-friendly, as settings can be made either directly on a touch panel or a PC interface.

„As soon as workpieces only need to be cut to pre-set grid lengths, or defective areas need to be cut out, a trimmer saw, specially designed for this purpose, is used.“


NETWORKED PRODUCTION

INTERFACE CONCEPTS
FOR COMPLETE
PRODUCTION LINES

Only the perfect interaction of all systems from master computers, system software, and PLC control ensures a flawless production process with a high degree of automation. When using the KALLFASS control concept, product data can be processed directly from the customer's ERP system. Moreover, the plant software of various manufacturers can be integrated into the manufacturing process.



NETWORKED PLANING/SORTING SYSTEM
Integration of customised applications

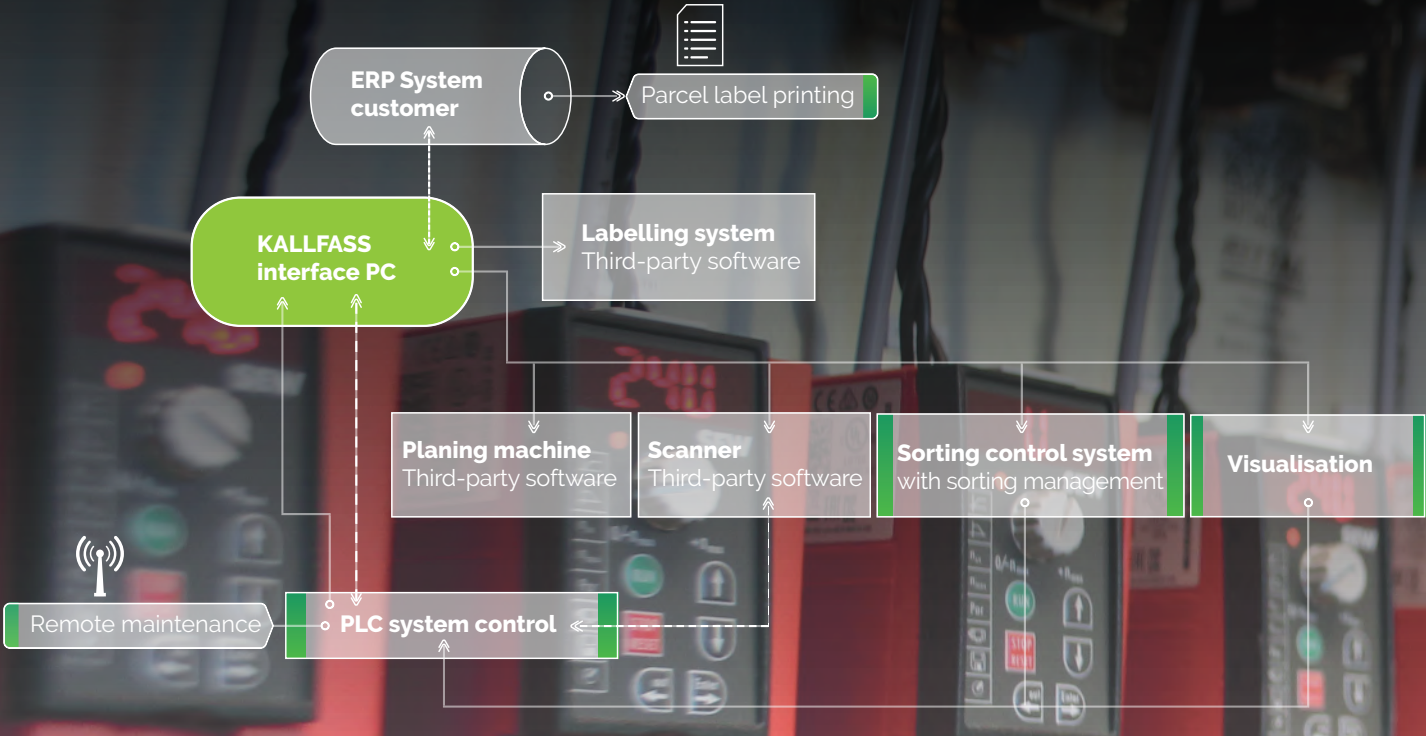

The data exchange between the customer ERP system and the KALLFASS interface PC usually takes place via CSV files. The latter are stored in a directory on the KALLFASS interface PC and processed from there. Continuously recorded production data is written back to the CSV files. The files are read out in cyclical intervals in order to return the current package data to the ERP system – according to a defined release procedure.

A SAFER PRODUCTION
ENVIRONMENT

Recognise and avoid risks
for the operating personnel

To make the operation of complex production lines as safe as possible, KALLFASS develops a safety concept for each project. Potential hazardous areas of the system are analysed in advance and documented internally in a risk assessment.

In very dangerous areas, doors and fences prevent access to the system. In addition, warning signs are installed to highlight any potential hazardous. Throughout the entire production line, PLC-controlled photoelectric barriers ensure the safety of the operating personnel. If an attempt is made to access the system manually at the wrong place, the system switches off automatically. When the system is first commissioned, the operating personnel are explicitly trained on the subject of operation & safety.

FROM THE PLANNING STAGES TO PRODUCTION

SOLUTIONS FROM A ONE-STOP PROVIDER

As your solution partner, we take responsibility and accompany you through all project phases until the system is successfully put into service. Moreover, we support you even after the project has been completed.

YOUR EXPERT FOR SPECIAL PROJECTS

Whether a prototype for a new product must be developed and made ready for series production, technical alternatives for process sequences must be found, or logistical challenges in the production environment must be accomplished – we design a customised, economical solution concept for you and put it into practice. Because thinking outside the box is what we do best.

01

PLAN

DOWN TO THE VERY LAST DETAIL.

We generate a planning concept, taking into account all requirements and interfaces. We integrate the installation drawing into the production environment, incorporating all necessary supply connections. And finally, we appoint a project manager to take charge of schedule monitoring and project coordination.

02

DO

ALL UNDER ONE ROOF.

After the concept has been approved, we design the mechanical system components using 3D CAD technology. The finished sub-assemblies are welded together, fitted and painted before being passed on to the final assembly department. Subsequently, the control cabinets are installed and wired in accordance with the electrical circuit diagrams. If possible, the individual machines are pre-wired on terminal boxes.

03

ACT

ON-SITE EXPER-TISE.

Our experienced technicians install the pre-assembled parts to form a complete system. Once the mechanical installation is completed, the control system for the production line is programmed. Subsequently, the interaction between the master computers, the system software and the PLC control system is optimised. At the start-up of the system, technical documentation is compiled and the operating personnel are trained with regard to safety and operation of the system.

SUPPORT DURING THE DAILY PRODUCTION

In the unlikely event of a malfunction, or if the process must be optimised, we will connect with you using our remote maintenance feature and guide you step-by-step to achieve your goal. Or, if feasible, we can simply drop by in person. On request, we will provide you with a spare parts quotation including recommendations for stocking production-relevant spare parts.



KALLFASS
maschinen plus
automation

www.kallfass-online.com

Kallfass GmbH Maschinen plus Automation

Röter Straße 44 | 72270 Baiersbrunn
Tel. +49 (0) 7442 8446-0

Otto-von-Guericke-Strasse 4 | 38855 Wernigerode
Tel. +49 (0) 3943 55931-0

info@kallfass-online.com